


Dimensions in "mm"

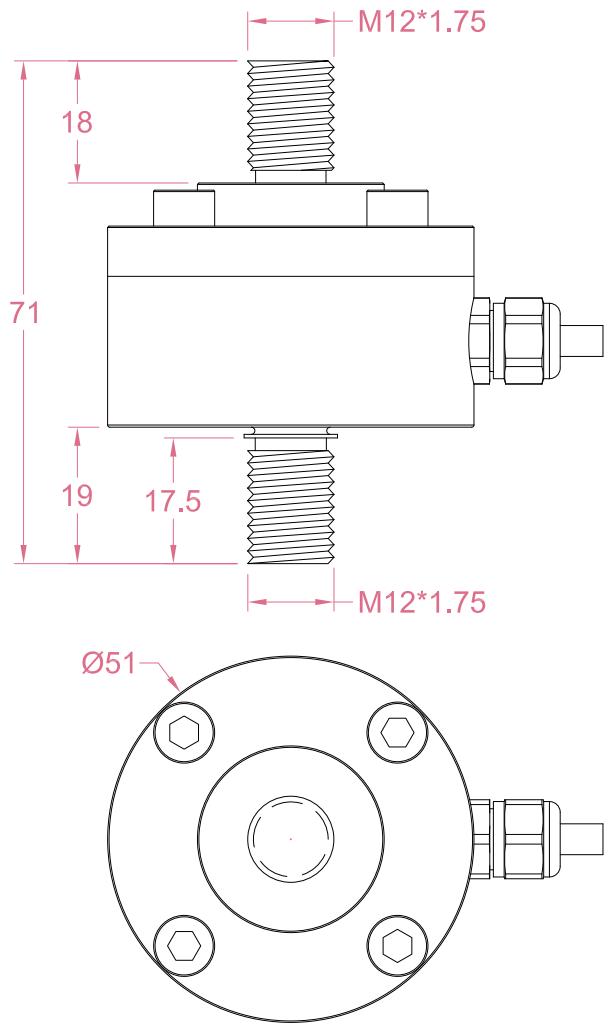

Order example:
5 x LCR07- 5kN - H

Quantity Model Capacity A: -20...+65°C
H: -40...+120°C

Email to sales@loadcellsensor.com for a quote


Specifications			
Rated Capacity	1/2/5/10/20 kN		
Rated Output	1.7 mV/V	Compensated Temp.	A: 0...+40°C H: -20...+80°C
Excitation	3~15V	Operating Temp.	A: -20...+65°C H: -40...+120°C
Zero Balance	±0.06 mV/V	Temp. Coeff. of Zero	±0.01% F.S./°C
Nonlinearity	±0.25% F.S.	Temp. Coeff. of Span	±0.01% F.S./°C
Hysteresis	±0.25% F.S.	Input Resistance	750±100 Ohms
Nonrepeatability	±0.1% F.S.	Output Resistance	700±10 Ohms
Creep(5min)	±0.1% F.S.	Insulation Resistance	>2000M Ohms(50V)
Safe Load Limit	150% F.S.	IP Rating	IP66
Breaking Load	200% F.S.	Element Material	Stainless steel
Cable	Ø4*3000mm 4-conductor shielded cable		

• LCS reserves the right to modify its design and specifications without notice


P:1/2



Load direction

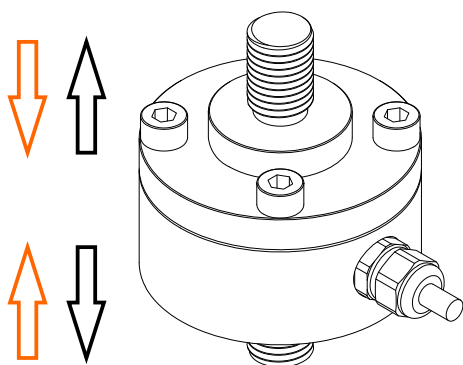

Wiring Code@Compression

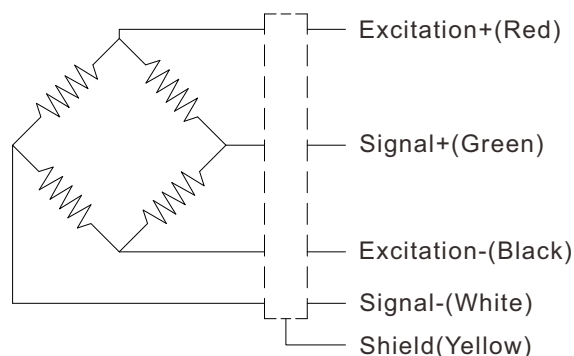

Shield is NOT connected to the sensor body

Sensor/Amplifier/Indicator

Items	Power supply	Output/Function
LCR07	3-15V (Constant)	-30mV...+30mV (Depending on the power supply)
LCR07 + Analog amplifier	12~24V DC	0-3.3V,0-5V,0-10V,0-2.5-5V,0-5-10V -3.3-3.3V,-5-5V,-10-10V 0-20mA,4-20mA,4-12-20mA...
LCR07 + Digital amplifier	12~24V DC	RS485 or RS232 output
LCR07 + Indicator	12~24V DC	Display force value Switch output Peak holding RS485/RS232 interface 0-5V/0-10V/4-20mA output
Email us for datasheet of amplifier and indicator		

Customization options

Cable (Length/Specifications/Connectors)
Dimensions and measuring range

